

**Interior Linings**

# 13MM MULTISTOP™ 3



**Description**

**13mm Multistop™ 3** is an excellent solution for projects demanding multiple functioning applications from internal linings. Multistop™ 3 is suitable for a wide range of wall and ceiling applications, ideal for high traffic areas requiring Fire, Impact resistance and acoustic performance.

**Board Specification**


Feature	Description
Board Thickness	13mm
Mass (nominal)	12.0 kg/m <sup>2</sup>
Edge Profile	Recessed Edge
Sheet Size (width x length)	Refer to local Sales Office for product sheet size availability
Paper Colour	Light Green
Fire Hazard Properties	Group 1 and an average specific extinction area less than 250 m <sup>2</sup> /kg - in accordance with NCC Specification C1.10 Fire Hazard Properties – Floors, Walls and Ceilings
Combustibility	Non-combustible material as defined in NCC Deem-to-Satisfy Provisions C1.9
VOC	Less than 0.5mg/m <sup>3</sup> TVOC
Manufacture	Manufactured in Australia to the requirements of AS/NZS 2588:2018 Gypsum plasterboard and in accordance with AS/NZS ISO 9001:2015 - Quality management systems – Requirements

**Advantages**

- Fire resistance
- High acoustic performance
- Impact resistance to incidental collision



## Performance Details

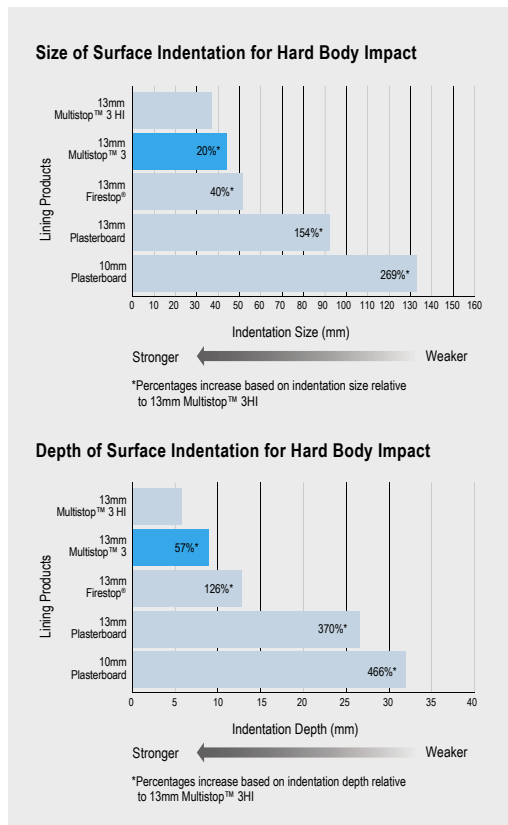

### Hard Body Impact Test

13mm Multistop™ 3 is subject to extensive hard body impact testing.

- Testing was conducted by a pendulum swing of a 100mm diameter 4.0kg steel ball on a 3.0m axis against the wall specimen
- An example of hard body impact is a bump by a hospital trolley or an intentional kick to wall surface

Testing conducted by Knauf NATA accredited Laboratory. Resistance to Impact – Test Report No HB 20120415.

### Fire

13mm Multistop™ 3 was fire tested and certified by BRANZ to meet the requirements of the National Construction Code (NCC).

- 13mm Multistop 3 contributes to the Fire Resistance Level when used in fire-rated systems. Refer to the Technical Bulletin for details and limitations

Fire tested to achieve the least fire hazard Group Number for wall and ceiling materials as defined by NCC (BRANZ report No. FH 15783).

### Acoustic

13mm Multistop 3, when used in an acoustic system can provide required levels of sound insulation to achieve specified acoustic ratings.

### Structural

13mm Multistop 3 complies to relevant deem-to-satisfy provisions of NCC Specification C1.8 Structural Tests for Lightweight Construction.

- Exceeds compliance criteria for NCC resistance to impact test to ASTM E695-03
- Exceeds compliance criteria for NCC resistance to static pressure test to ASTM E72-15

---

## Installation

Refer to Knauf website [www.knaufapac.com/au/plasterboard](http://www.knaufapac.com/au/plasterboard) or call TecASSIST on 1800 811 222

---

## Sustainability

Knauf products are manufactured from a combination of natural gypsum, and paper liner made from 100% reclaimed and recycled paper waste. Plasterboard waste can be reclaimed and recycled into new plasterboard. Lightweight plasterboard construction offers the benefits of low embodied energy, non-toxic materials, and ease of thermal and acoustic upgrading.

---

## Waste Management

Waste collection services are available to divert acceptable plasterboard waste away from land fill for recycling or reprocessing for other uses. For information on waste collection services available, please contact your local Knauf office.

© 2022 KNAUF GYPSUM PTY LTD. The trademarks, Firestop, Multistop, Partiwall, IntRwall, Shaftliner and TecASSIST are trademarks or registered trademarks of Knauf Gypsum Pty Ltd or one or more of its affiliates including Knauf Gips KG. Product availability should be checked with your local Knauf Sales Office as availability may vary. Read Product Data Sheet and literature before specification and installation. Knauf Gypsum Pty Ltd – ABN 84 004 231 976 17/47 Turner Street, Port Melbourne, VIC 3207.

KNA-001 03/2022